



Pouring Ladles

Unidades de Colada


Insertec has developed a new range of self-flowing castable.

BERELOC:

- . Low-porosity.
- . Minimize the attack of slag and metal.

Insertec ha desarrollado una nueva gama de autocolables, **BERELOC**, con las siguientes ventajas :

- . Baja porosidad.
- . Mínimo ataque de escorias y metal.

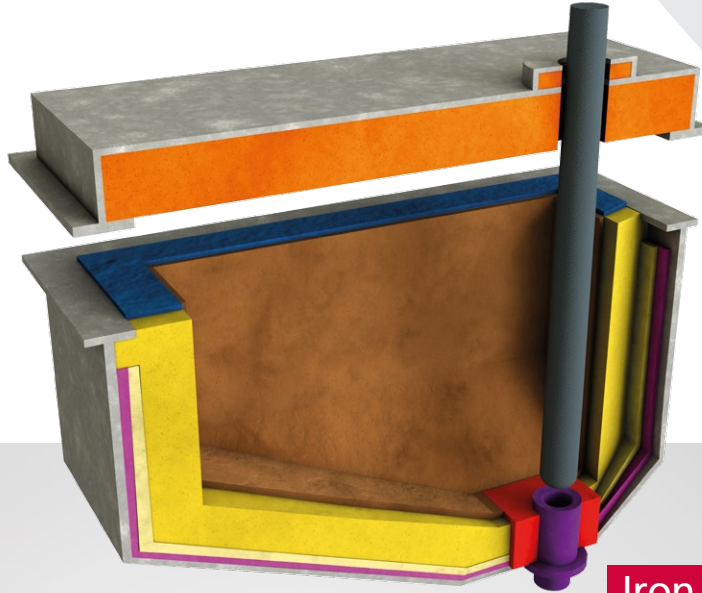


Iron \ Hierro

Steel \ Acero

Area	Product name	Description	Main component	Max. Service Temp.(°C)	Density kg/m ³	SiO ₂ %	Al ₂ O ₃ %	Others
Tapa \ Cover	INSELOC 81 SR	LCC	B	1700	2800	9	84	
	INSELOC 61 SR	LCC	A	1650	2500	34	60	
	INSETAB G	RC	TA	1800	2900	0,1	96	
	INSELITE 1600	RCC	AC	1600	1100	0,13	86	
Inlet spout\ Piquera entrada	ULTRALOC B	ULCC	B	1700	2950	12	83	
	ULTRATAB 90 V	ULCC	TA	1750	3200	2	85	Cr ₂ O ₃
	INCROTAB 10 SR	LCC	TA	1700	3000	1	88	Cr ₂ O ₃
Outlet spout \ Piquera salida	INSELOC 95 V	LCC	TA	1770	3000	1	93	
	BERELOC 50 Z	SFC	TA	1700	2900	28	56	ZrO ₂
	INSECAST 80 N	RC	B	1700	2850	10	80	
	ULTRALOC B	ULCC	B	1700	2950	12	83	
Working lining \ Capa de trabajo	INSETAB SP	LCC	TA	1800	2900	1	90	MgO
	BERELOC 50 Z	SFC	TA	1700	2900	28	56	ZrO ₂
	BERELOC 60Z	SFC	A	1700	2950	25	60	ZrO ₂
	ULTRALOC I	ULCC	B	1750	2900	16	80	
	ULTRATAB 95	ULCC	TA	1850	3050	2	97	
	INSECAST 80 N	RC	B	1700	2850	10	80	
	INSECAST 85 G	RC	B	1700	2600	18	75	
INSELOC 81 SR	LCC	B	1700	2800	9	84		
Patching \ Parcheo	INSEGUN 82 BI	DGM/TM	B	1750	2650	6	85	
	INSEGUN 52 BI	DGM/TM	CH	1650	2200	38	55	
	INSEGUN 60 E	DGM	B	1650	2400	22	69	

Pouring Ladles

Unidades de Colada

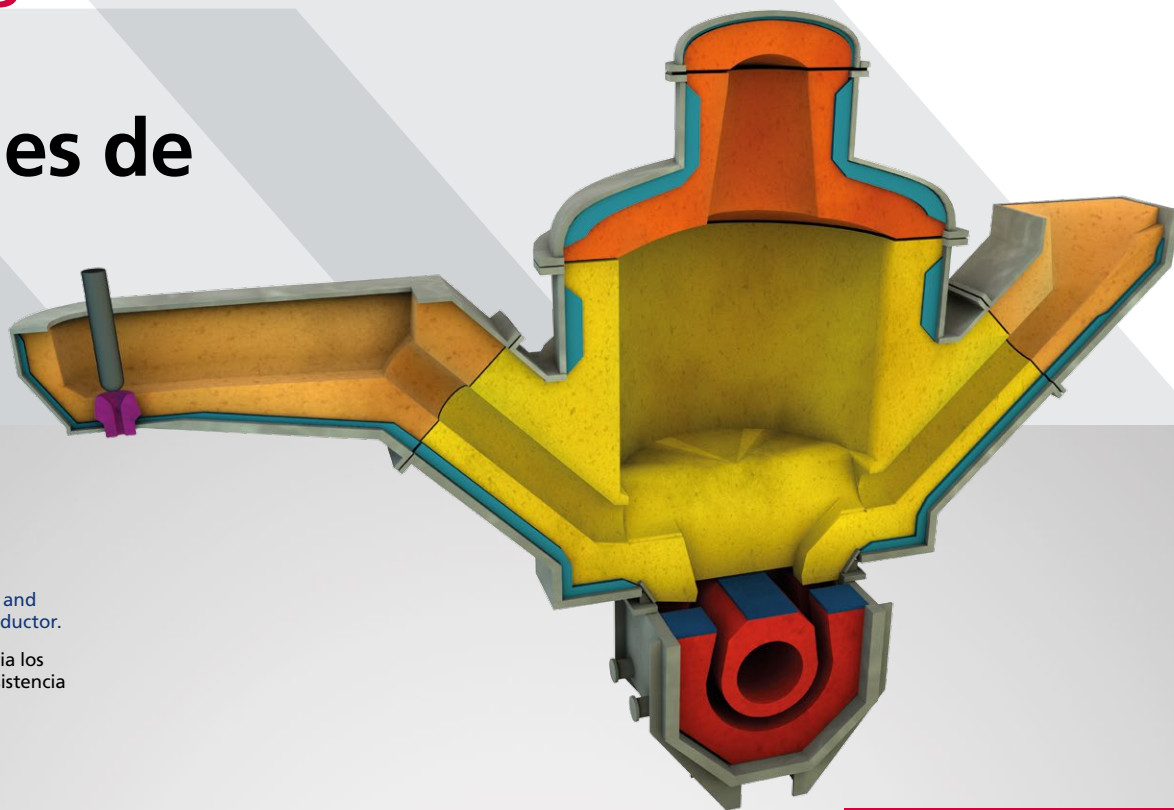

Insertec tips Check daily the reactance and resistance values of the inductor.
Comprueba de forma diaria los valores de reactancia y resistencia del inductor.

Iron \ Hierro

Area	Product name	Description	Main component	Max. Service Temp.(°C)	Density kg/m ³	SiO ₂ %	Al ₂ O ₃ %	Others
Tapa \ Cover	INSELOC 61 SR	LCC	A	1650	2500	34	60	
	INSELITE 1600	RCC	AC	1600	1100	0,13	86	
Inlet spout \ Piquera entrada	INSELOC 95 V	LCC	CM	1770	3000	2	90	
	ULTRALOC B	ULCC	B	1700	2950	12	83	
	ULTRATAB 90 V	ULCC	TA	1750	3200	2	85	Cr ₂ O ₃
	INCROTAB 10 SR	LCC	TA	1700	3000	1	88	Cr ₂ O ₃
Outlet spout \ Piquera salida	INSELOC 95 V	LCC	TA	1770	3000	1	93	
	BERELOC 50 Z	SFC	TA	1700	2900	28	56	ZrO ₂
	ULTRALOC B	ULCC	B	1700	2950	12	83	
Working lining \ Capa de trabajo	INSELOC 95V	LCC	CM	1770	3000	2	90	
	INSETAB SP	LCC	TA	1800	2900		90	MgO
	BERELOC 60 Z	SFC	A	1700	2950	25	60	ZrO ₂
	INSETAB G	RC	TA	1800	2900	0,1	96	
	ULTRALOC I	ULCC	B	1700	2900	6	85	
	ULTRATAB 95	ULCC	TA	1850	3050	2	97	
	INSECOR 95 S	DRM	BFA	1650	2900	<1	94	
	INSECOR 70	DRM	A	1650	2600	35	65	
Patching \ Parcheo	GUNLITE 1400	DGM/TM	CH	1300	1300	54	33	
	INSEGUN 82 BI	DGM/TM	B	1750	2650	6	85	
	INSEGUN 52 BI	DGM/TM	CH	1650	2200	38	55	

Etzerre Kaminoa 21 \
48970 Basauri \ Bizkaia \ Spain

Tel.: +34 - 944 409 420 (Furnaces)
+34 - 944 409 450 (Refractories)

insertec@insertec.biz

insertec
Furnaces & Refractories